




SB 同心型扣环

轴用同心型扣环

SAE标准产品

当扣环置于适用的轴上沟槽时，从沟槽露出的扣环部分可固定和防止零件移动。

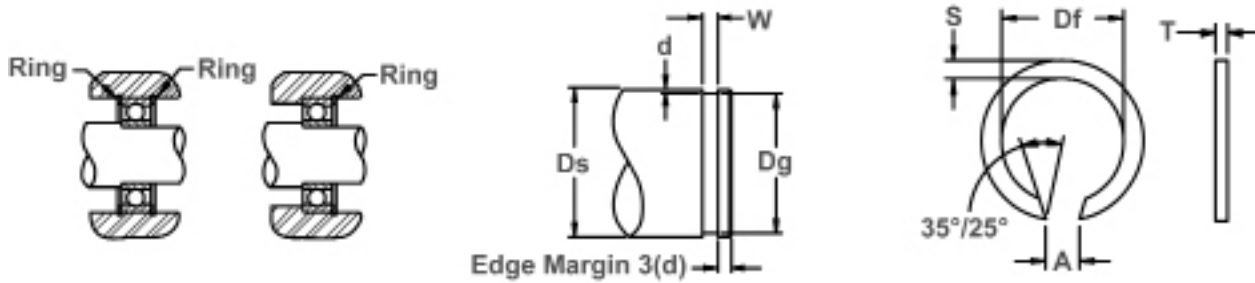

上图为扣环固定轴承在轴上的典型方法

轴承直径&沟槽尺寸

自由直径&扣环尺寸

扣环 编号	轴承直径		轴承编号				沟槽尺寸			扣环尺寸							
	Ds DEC	Ds mm					沟槽直径		沟槽宽度	深度	自由直径		板厚	板宽	自由间隙直径		
			Dg	公差	W	d	Df	公差	T±.002	S	A最小	A最大					
SB-12	.4724	12.00	201	301	--	.436	±.002	.046 +.003 -.000	.018	.421	+0.000 -.020	.042	.062 ±.003	.062	.187		
SB-15	.5906	15.00	202	302	--	.550		.053	.020	.538	+0.000	.047	.078	.078	.218		
SB-17	.6693	17.00	203	303	403	.629		+0.004 -.000	.020	.616	-.025	.047	±.003	.078	.218		
SB-20	.7874	20.00	204	304	404	.731		.068	.028	.710		.062	.093 ±.003	.078	.218		
SB-25	.9843	25.00	205	305	405	.924		+0.004 -.000	.030	.910	+0.000	.062	.109 ±.003	.156	.312		
SB-30	1.1811	30.00	206	306	406	1.111	.085 +.004 -.000	.035	1.093	.075		.125 ±.005	.156	.312			
SB-35	1.3780	35.00	207	307	407	1.288	.108	.045	1.265	-.031		.093	.156	.250	.406		
SB-40	1.5748	40.00	208	308	408	1.465	+0.005	.055	1.452			.093	±.005	.250	.406		
SB-45	1.7717	45.00	209	309	409	1.648	-.000	.062	1.625	.093		.188	.250	.468			
SB-50	1.9685	50.00	210	310	410	1.844	±.004	.062	1.820	+0.000	.093	±.005	.250	.468			
SB-55	2.1654	55.00	211	311	411	2.015			.120		.075	1.995	-.046	.109	.218	.250	.468
SB-60	2.3622	60.00	212	312	412	2.212			+0.005 -.000		.075	2.187		.109	±.005	.250	.468
SB-65	2.5591	65.00	213	313	413	2.389			±.006		.085	2.359	+0.000	.125	.250	.250	.468
SB-70	2.7559	70.00	214	314	414	2.586						.085		2.556		.125	.125
SB-75	2.9528	75.00	215	315	415	2.783	.139	.085		2.750		+.000		.125		.250	.500
SB-80	3.1496	80.00	216	316	416	2.979	+0.006	.085		2.946				-.062	.125	.250	.500
SB-85	3.3465	85.00	217	317	417	3.176	-.000	.085		3.139		.125			.250	.500	
SB-90	3.5433	90.00	218	318	418	3.343	±.006	.100	3.308	+0.000	.125	.312	.312	.625			
SB-95	3.7402	95.00	219	319	419	3.540			.100		3.500		-.078	.125	.312	.625	
SB-100	3.9370	100.00	220	320	420	3.737			.174	.100	3.697			+.000	.156	±.005	.312
SB-105	4.1339	105.00	221	321	421	3.934			+0.008	.100	3.888		.156		.312	.625	
SB-110	4.3307	110.00	222	322	422	4.131			-.000	.100	4.080		-.093		.156	.312	.687

单位: mm

硬度: 全尺寸: HRC 42~52

如需了解备用前端部设计，请与我们联系。E-mail: china@rotorclip.com

