





SLC/SLO SHC/SHO 同心型扣环

轴用同心型扣环 方形钢丝


当扣环置于适用的轴上沟槽时，从沟槽露出的扣环部分可固定和防止零件移动。

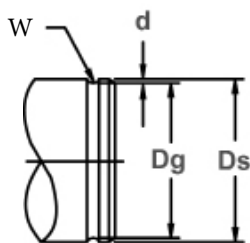

轴承直径&沟槽尺寸



自由直径&扣环尺寸

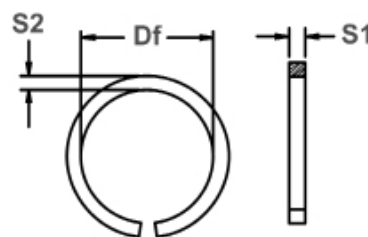

原材料: SAE 1060-1075

扣环编号		沟槽直径		沟槽尺寸			扣环尺寸						
				沟槽直径	沟槽宽度	深度	自由直径		板宽			自由间隙直径	
闭锁型*	开放型*	Ds DEC	Ds mm	Dg	公差	W ±.002	d	Df	公差	S1	公差	S2 ±.005	A 最大
SHC-25	SH0-25	.250	6.35	.234	+.003 -.000	.036	.008	.230	+.000 -.020	.031	±.002	.031	.210
SLC-31	SL0-31	.312	7.92	.296		.036	.008	.290		.031		.031	.260
SHC-31	SH0-31	.312	7.92	.292		.045	.010	.287		.039		.039	.260
SLC-37	SL0-37	.375	9.53	.357		.041	.009	.350		.035		.035	.315
SHC-37	SH0-37	.375	9.53	.351		.052	.012	.344		.046		.046	.310
SLC-43	SL0-43	.437	11.10	.417		.045	.001	.410	.039	.039		.370	
SHC-43	SH0-43	.437	11.10	.409		.062	.014	.403	.055	.055		.360	
SLC-50	SL0-50	.500	12.70	.476		.052	.012	.469	.046	.046		.420	
SHC-50	SH0-50	.500	12.70	.468		.069	.016	.461	.062	.062		.410	
SLC-56	SL0-56	.562	14.27	.530		.069	.016	.523	.062	.062		.470	
SHC-56	SH0-56	.562	14.27	.526	.078	.018	.519	.071	.071	.465			
SLC-62	SL0-62	.625	15.88	.597	.062	.014	.590	.055	.055	.525			
SHC-62	SH0-62	.625	15.88	.585	.085	.020	.578	.078	.078	.515			
SLC-68	SL0-68	.687	17.45	.659	.062	.014	.652	.055	.055	.580			
SHC-68	SH0-68	.687	17.45	.647	.085	.020	.640	.078	.078	.570			
SLC-75	SL0-75	.750	19.05	.718	.069	.016	.711	.062	.062	.630			
SHC-75	SH0-75	.750	19.05	.704	.100	.023	.694	.093	.093	.625			
SLC-81	SL0-81	.812	20.62	.780	.069	.016	.773	.062	.062	.690			
SHC-81	SH0-81	.812	20.62	.766	.100	.023	.759	.093	.093	.675			
SLC-87	SL0-87	.875	22.23	.839	.078	.018	.831	.071	.071	.735			
SHC-87	SH0-87	.875	22.23	.821	.117	.027	.813	.109	.109	.725			
SLC-93	SL0-93	.937	23.80	.901	.078	.018	.893	.071	.071	.790			
SHC-93	SH0-93	.937	23.80	.883	.117	.027	.875	.109	.109	.775			
SLC-100	SL0-100	1.000	25.40	.960	±.003	.085	.020	.950	+.000 -.035	.078	±.002	.078	.850
SHC-100	SH0-100	1.000	25.40	.938		.133	.031	.928		.125		.125	.825
SLC-106	SL0-106	1.062	26.97	1.022		.085	.020	1.012		.078		.078	.895
SHC-106	SH0-106	1.062	26.97	1.000		.133	.031	.990		.125		.125	.880
SLC-112	SL0-112	1.125	28.58	1.079		.100	.023	1.068		.093		.093	.950
SHC-112	SH0-112	1.125	28.58	1.055		.148	.035	1.044	.140	.140		.930	
SLC-118	SL0-118	1.187	30.15	1.141		.100	.023	1.130	.093	.093		1.000	
SHC-118	SH0-118	1.187	30.15	1.117		.148	.035	1.106	.140	.140		.980	
SLC-125	SL0-125	1.250	31.75	1.196		.117	.027	1.184	.109	.109		1.050	
SHC-125	SH0-125	1.250	31.75	1.172		.164	.039	1.160	.156	.156		1.030	
SLC-131	SL0-131	1.312	33.32	1.258	.117	.027	1.246	.109	.109	1.100			
SHC-131	SH0-131	1.312	33.32	1.234	.164	.039	1.222	.156	.156	1.085			
SLC-137	SL0-137	1.375	34.93	1.315	.128	.030	1.304	.120	.120	1.150			
SHC-137	SH0-137	1.375	34.93	1.289	.180	.043	1.276	.172	.172	1.125			
SLC-143	SL0-143	1.437	36.50	1.377	.128	.030	1.364	.120	.120	1.205			
SHC-143	SH0-143	1.437	36.50	1.351	.018	.043	1.338	.172	.172	1.180			
SLC-150	SL0-150	1.500	38.10	1.438	.133	.031	1.424	.125	.125	1.260			
SHC-150	SH0-150	1.500	38.10	1.406	.195	.047	1.392	.187	.187	1.245			
SLC-162	SL0-162	1.625	41.28	1.563	.133	.031	1.547	.125	.125	1.375			
SHC-162	SH0-162	1.625	41.28	1.531	.195	.047	1.516	.187	.187	1.350			
SLC-175	SL0-175	1.750	44.45	1.672	.164	.039	1.657	.156	.156	1.475			

单位: inch

* (注) : H=重负荷用; L=轻负荷用

硬度: 全尺寸: HRC 46 ~ 53

